


Refrigerant		Connection	
Factory	Charge	(kg)	-
Piping	Distance	(ft)	-
Add.	Charge	(ft)	m
Gas	Pipe	Diameter	(in)
Liquid	Pipe	Diameter	(in)

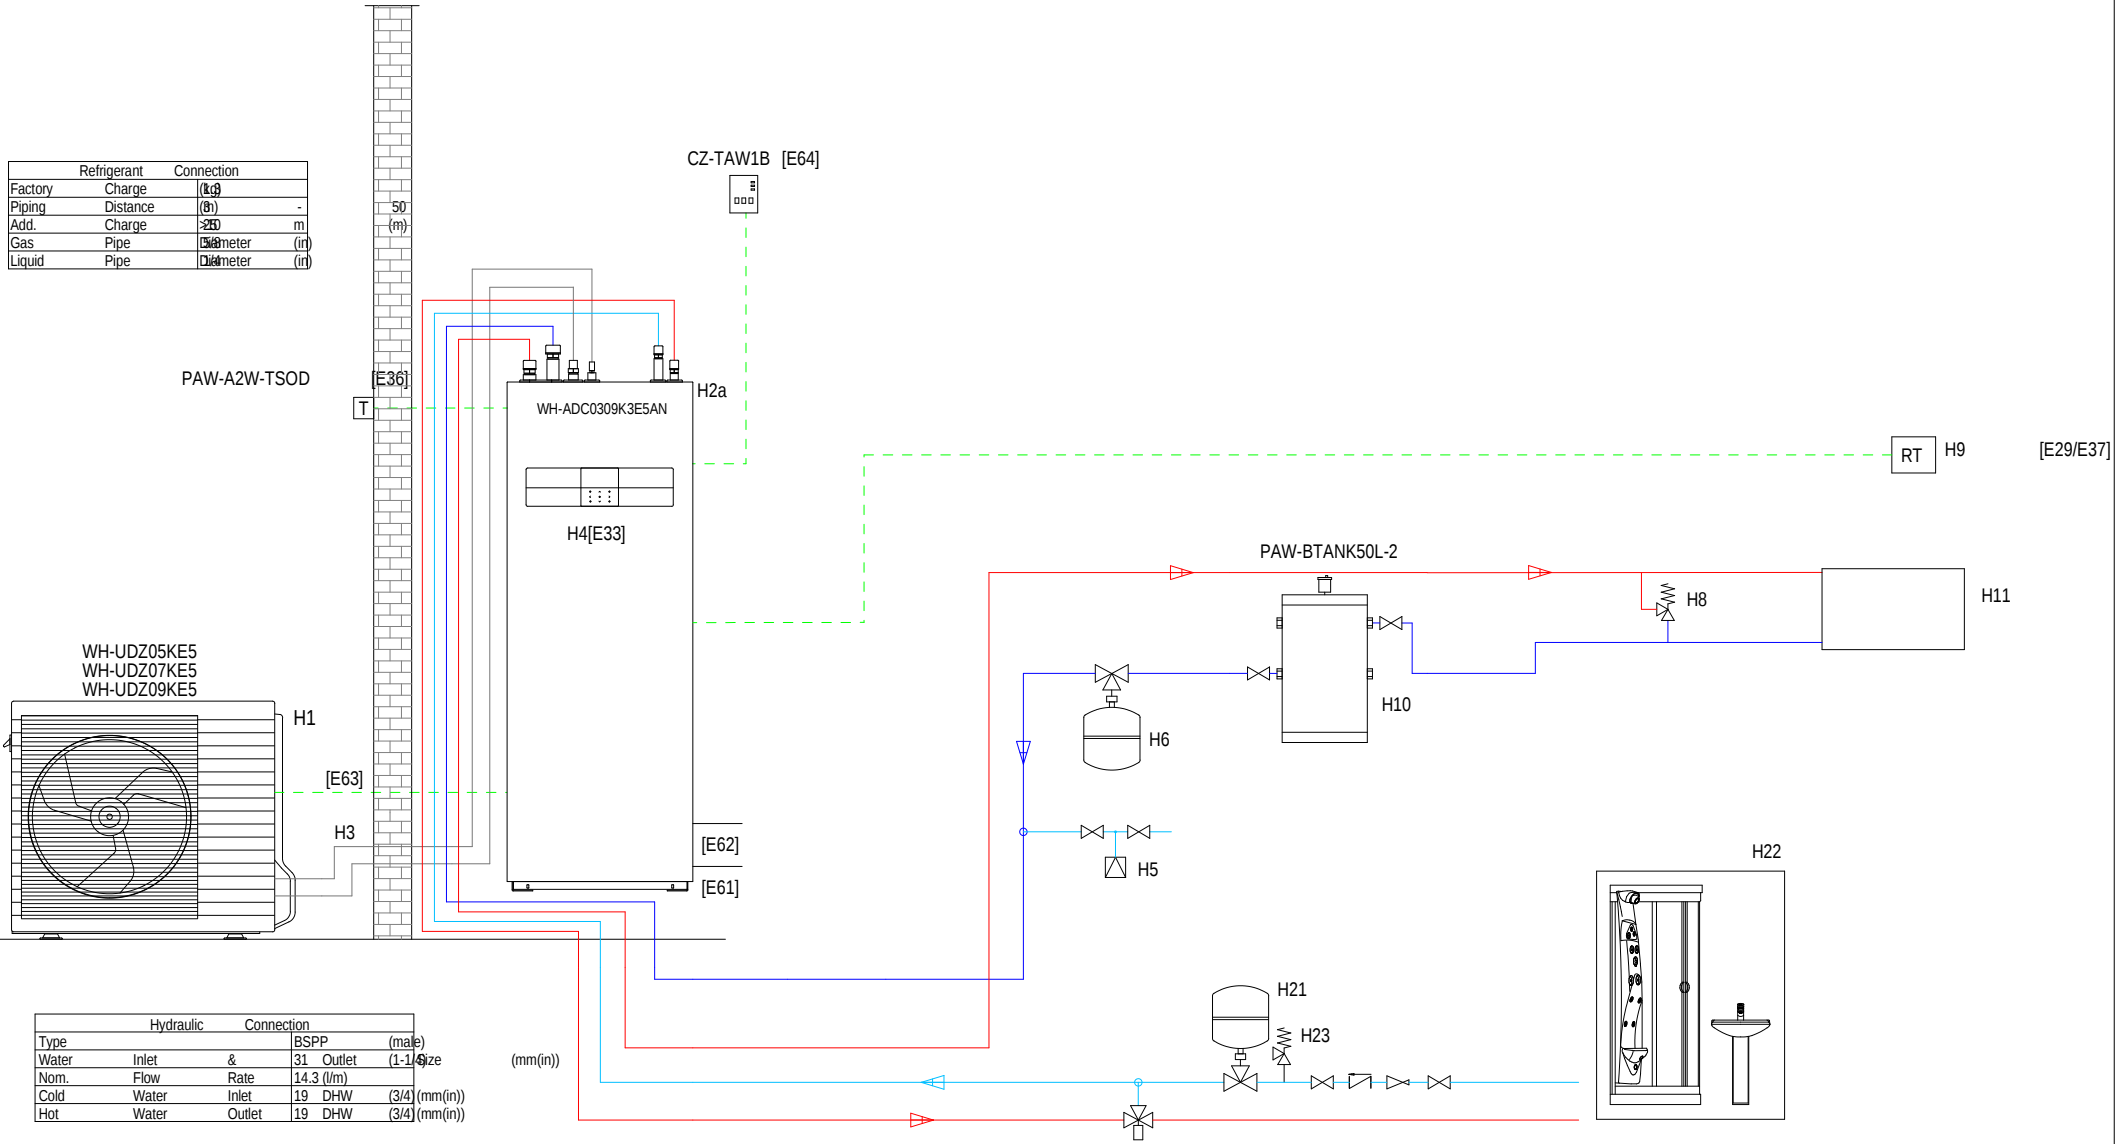

Hydraulic		Connection	
Type		BSPP	(male)
Water	Inlet	&	31 Outlet (1-1/2)
Norm.	Flow	Rate	14.3 (l/m)
Cold	Water	Inlet	19 DHW (3/4) (mm(in))
Hot	Water	Outlet	19 DHW (3/4) (mm(in))

Panasonic

2024-03-29,08:35:52

WH-ADC0309K3E5AN

+

WH-UDZ05KE5

Beispiel

Beispiel

